Obo








Samples of composition/Exemple de combinații/Esempi di composizione

Multiple pendants must be installed with one of the canopy options listed on pages 673/675. Variante multiple de suspensii pot fi asamblate cu ajutorul bazelor optionale prezentate la paginile 673/675. Sospensioni multiple possono essere installate sui rosoni presenti alle pagine 673/675.

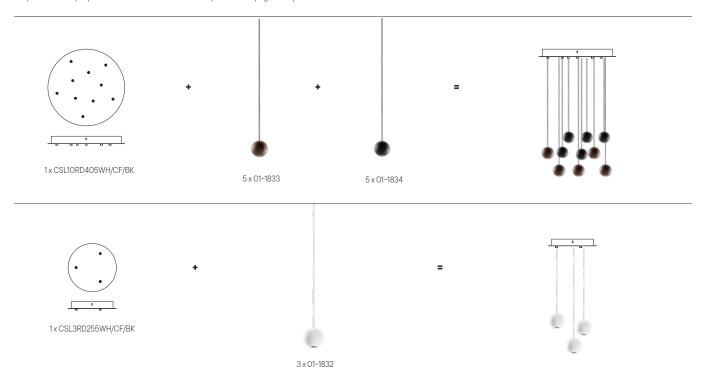



Series of light fixtures for interior equipped with one SMD LED, structure and diffuser in aluminum painted in sand white, sand coffee, sand black, brushed brass or rose gold.

Serie de corpuri de iluminat pentru interior echipate cu un LED SMD, structură și dispersor din aluminiu vopsite alb mat, maro mat, negru mat, alamă sau aur roz.

Serie di apparecchi per interni equipaggiati con un LED SMD, struttura e diffusore in aluminio verniciati bianco opaco, caffe opaco, nero opaco, ottone oppure oro rosa.

Серия светильников для интерьера, оснащенных светодиодом SMD, структура из алюминия окрашенного в матовый белый, матовый кофе, матовый черный, латунь или розовое золото.

Beltéri lámpa testek, SMD LED-el szerelve,matt fehér, matt barna, matt fekete, sárgaréz vagy rózsa arany aluminíum szerkezet és diszperzór.

Серия от интериорни осветители с SMD LED платки. корпус от алуминий в бял мат, кафе мат, черен мат, месинг или розово злато.

Séria svietidiel pre interiér vybavená jednou LED diódou SMD, konštrukcia a difúzor v hliníkovom prevedení v matnej bielej, matnej kávovej, matnej čiernej farbe, mosadz alebo ružové zlato.



art. **01-1832** Sand White

art. 01-1833 Sand Coffee art. **01-1834** Sand Black

art. 01-2358 Rose Gold art. 01-2357 Brushed Brass



art. 01-2804 Sand White

art. 01-2807 Sand Coffee

art. 01-2808 Sand Black

art. **01-2805** Rose Gold art. 01-2806 Brushed Brass



SMD LED 5050 BRIDGELUX 1 pc x 4,5W Led type

Power 4,5W

220V-240V, 50/60Hz Input

Color temperature 3000K 405 lm Lumen source 270 lm Lumen system Optic 389 \otimes Not dimmable





BRIDGELUX COB LED 1 pc x 8,5W Led type

220V-240V, 50/60Hz Input

Color temperature 3000K Lumen source 679 lm 410 lm Lumen system Optic 36° CRI



C€**⊌IP20**









art. **01-1829** Sand White art. **01-1830** Sand Coffee art. **01-1831** Sand Black






Led type SMD LED 5050 BRIDGELUX1pc x 4,5W

Power 4,5W

Input 220V-240V, 50/60Hz

Color temperature Lumen source 405 lm Lumen system 270 lm Optic 38°
CRI 90
Not dimmable

(∈⊕IP20

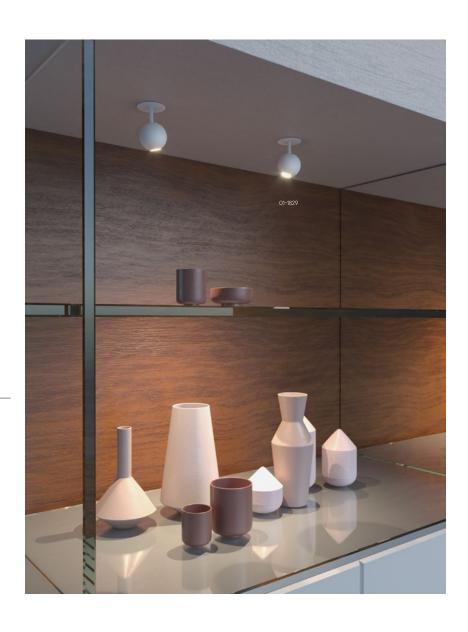



Metal accessories painted in sand white or sand black for installing the suspensions in trimless version.

Maximum diameter of cable access hole 4,5 mm.

 $\label{lem:constraint} \mbox{Accesorii din metal vopsit alb mat sau negru mat, pentru montajul trimless al suspensiilor.}$

Diametrul maxim al găurii de ieșire a cablului 4,5 mm.

Accessori in metallo verniciato bianco opaco o nero opaco per montaggio delle sospensioni a filo muro (trimless).
Diametro massimo del foro di uscita del cavo elettrico 4,5 mm.

